



GENERAL
P  W E R[®]

Line interactive UPS

GP Series


500VA~1200VA



Ideal applications:

Home PC, SOHO, small scale exchange, supermarket POS machines, workstation and peripheral devices.

Control Panel

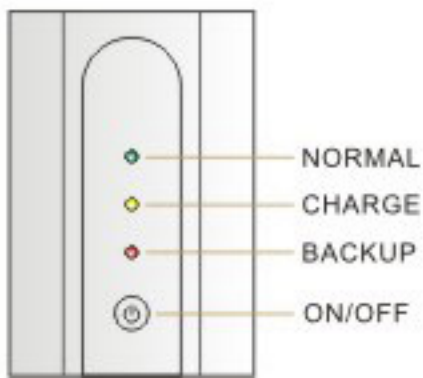

- DC cold start.
- Wide input voltage function.
- LED display & AVR function.
- Self-diagnostic function.
- Overload and short circuit protection.
- Auto charging as long as mains is available regardless of UPS status.
- Auto startup and shutdown upon depletion of battery
- Battery overcharge protection.
- Built-in power purifying circuit restrains distortion of lightning strike, pulses and etc.

◆ Rear Panel



- AC INPUT
- FUSE
- UPS OUTPUT
- RJ11
- BREAKER

Specifications

ITEM	Model	GP-500	GP-650	GP-800	GP-1000	GP-1200
Output Power		500VA/300W	650VA/390W	800VA/480W	1000VA/600W	1200VA/720W
Input	Voltage range	140V~280Vac				
	Frequency range	Same as mains				
Output	Voltage	220V±8%(Battery mode)				
	Frequency	50Hz(Battery mode)				
	Transfer time	<2mS				
	Waveform	Modified sine wave(Battery mode)				
Battery	Type	Sealed lead acid maintenance free				
	Battery number	12VDC				
	Dc voltage	1x12V/7.5Ah	1x12V/9Ah	1x12V/9Ah	2x12V/7.5Ah	2x12V/7.5Ah
	Recharge time	After fully discharged, charge 8 hours to 90% capacity				
Protecting	Output overload, battery low voltage, short circuit overload					
Alarm Indicator	Battery backup	Sounding every 4 seconds				
	Battery low	Sounding every 1 second				
	Overload	Shutdown at once				
	LED	LED indicator for line on, battery backup, charge				
Operating Temperature	0~40°C					
Relative Humidity	20%~90% non-condensing					
Breaker / RJ11	Optional					
Output socket	2 pieces			3 pieces		
Gross weight	6.2kg	6.5kg	7.5kg	11kg	11.5kg	
Pack Size(LxWxH)	372mmx150mmx220mm			450mmx195mmx275mm		